

VOL.5 BRAILLE & TACTILE












HOMOGENEOUS TACTILE (BRAILLE TILE) Sense of Touch

The Ideal Guide Path with a combined aesthetic presentation and functionality. Designed for the sense of touch. It helps the blind and visually impaired navigate cities, tactile paving units are like braille for pavements. These raised bumps and ridges help guide people down sidewalks and across intersections.

Colour Available:

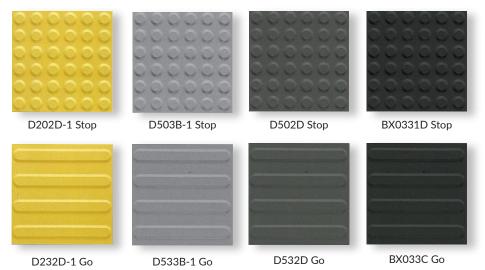



Technical Specification MS ISO 13006 : 2014 Sirim Certificate no : PC000082

•Length and width	+/- 1.0
Thickness	+/- 10.0
•Straightness of sides	+/- 1.0
 Rectangularity 	+/- 1.0
•Surface Curvature	+/- 1.0
•Surface Warpage	+/- 1.5
 Water Absorption 	< 3%
• Chemical Resistance	Compiled
 Modulus of Rupture 	>23N/sqmm
•Scratch Hardness, MOHs	>5

- Full body porcelain material.
- Our Tac tile are certified and used for Malaysia MRT and LRT project.

Model	Size	Product Code	Colour	Pcs/Ctn	Pcs/sqm	List Price	
Model						RM/sqm	RM/pc
300mm	300x300x15mm	D202D-1 Stop D232D-1 Go	Yellow	11	11	198.00	18.00
	300x300x15mm	D503B-1 Stop D533B-1 Go	Light Grey	11	11	198.00	18.00
300mm 300mm	300x300x15mm	D502D Stop D532D Go	Grey	11	11	198.00	18.00
	300x300x15mm	BX0331D Stop BX033C Go	Black	11	11	275.00	25.00









STAINLESS STEEL TACTILE Everlasting Tough

Stainless steel 'studs' or 'strips' are commonly used by the transportation authorities on rail transit stations or by building owners in commercial buildings/private buildings to provide guidance for movement.

Grade 316

Stainless steel is a metal alloy, made up of steel mixed with elements such as **chromium**, **nickel**, **molybdenum**, **silicon**, **aluminum**, **and carbon**. Iron mixed with carbon to produce steel is the main component of stainless steel. Chromium is added to make it resistant to rust.

The main factor in the selection process for stainless steels is corrosion resistance. Careful consideration of the application should be done to enable a choice of grade to an economic minimum. Other considerations such as mechanical properties (strength and toughness). Lobby, LRT and MRT station, building walkway (interior)







Top View Bottom View

Top View



Bottom View

XC-MDD1114C

Size : 35x25x4.5mm / Pin Ø 6x13mm

Grade: 316S/S Price: RM 5.50/pc



Size : 290x35x5m / Pin:6m

Grade: 316S/S **Price: RM 60.00/pc**







Top View

Bottom View





XC-MDD1345F

Size : 35x25x4.5mm / Pin Ø 6x13mm

Grade: 316S/S Price: RM 5.00/pc

XC-MDT5067D

Size : 290x35x5mm / Pin:6m

Grade: 316S/S Price: RM 45.00/pc







GNG Distributors Sdn. Bhd. 200501002167 (679213-U)



C Terracotta Tiles Centre Sdn. Bhd. 199701019345 (434842-H) Headquaters

No.15 Jalan Pendidik U1/31 Hicom Glenmarie Ind.Park 40150 Shah Alam, Selangor Darul Ehsan.

Tel: +603-5569 4779 (hunting line) Fax: +603-5569 4791 Mosaic Gallery Penang

199-G Jalan Argyll, 10050 Penang Tel/Fax: +604-227 9679 Mosaic Gallery Sarawak Lot 3265 (Sublot 52),

Ground Floor
TT3 Commercial Centre
Jalan Canna
93350 Kuching Sarawak.

Tel: +6014-6898818 Fax: +6082-364039 Mosaic Gallery Johor (1) No.45, Jalan Ros Merah 1/1, Taman Johor Jaya, 81100 Johor Bahru, Johor.

81100 Johor Bahru, Johor. Tel: +6012-765 6206 +6017-774 6026 Mosaic Gallery Johor (2) No. 26(GF),

No. 20(GF), Jalan Kempas Lama 2/1, Kempas Lama, 81200 Johor Bahru, Johor Tel: +6012 - 288 9742 Fax: +603-8080 8823

